
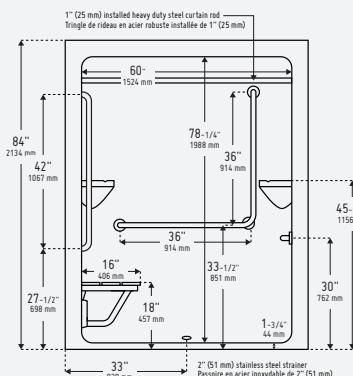



SC2366

66" one piece acrylic shower

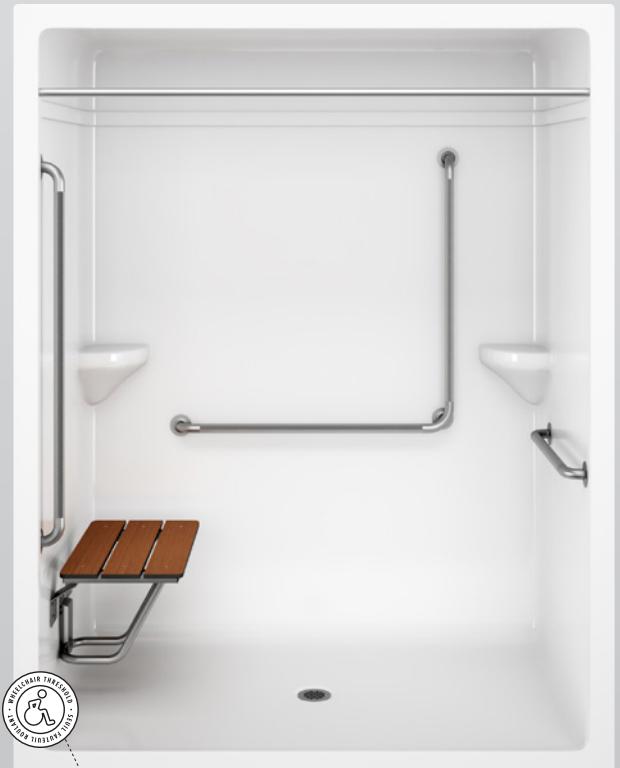


h 84" x w 66" x d 36-1/2"
Standard threshold height: 1-3/4"

230 lb / 104 kg
(Weight may vary by options and configuration of unit)

Centre drain

PRODUCT SPECIFICATIONS

- High quality, non-porous acrylic surface is easy to clean, germ and residue free
- Superior strength and weight designed for institutional and special care applications
- Factory installed knurled finish, stainless steel grab bars (3) for safety and ease of shower entry and exit
- Factory installed stainless steel shower curtain rod
- Available with moulded left seat, right seat or no seat
- Front drip lip
- Reinforced shower base provides added strength to unit
- Quality 2" / 51 mm ABS drain with stainless steel strainer
- Self draining soap dishes/shelves
- Designed for recessed floor installation - the SC2366 barrier free showers provide the user with a barrier free transition into the shower
- Can be customized with a wide range of accessories and options
- OBC Compliant

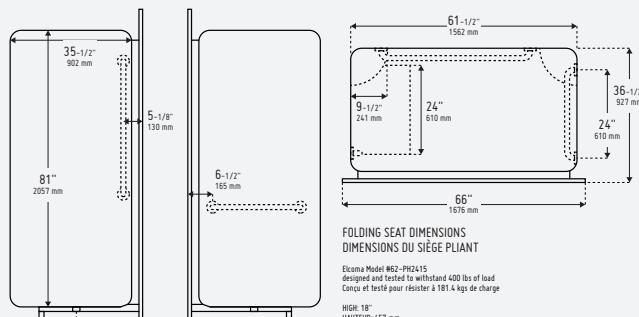

FOLDING SEAT DIMENSIONS DIMENSIONS DU SIÈGE PLIANT

Elcema Model #62-PH2415
designed and tested to withstand 400 lbs of load
Conçu et testé pour résister à 181,4 kg de charge

HEIGHT: 18" HAuteur: 457 mm
DEPTH: 16" Profondeur: 394 mm
WIDTH: 24" Largeur: 610 mm

For general information purposes only and may contain optional equipment and/or configurations. Please consult your wholesaler, sales associate or Longevity Acrylics Inc. to obtain current dimensions, specifications, guidelines, options and prices which are available thru Longevity Acrylics Inc current Price Book. Dimensions of fixtures are nominal and may vary +/- 1/2" (12 mm). Optional equipment, specifications and measurements are subject to change at manufacturers discretion. Position and size of deck mounted faucets vary - ensure proper fitment before installing any deck mounted faucets on any bathing fixture. Unless otherwise specified, the option and grab bar positioning is pre-determined by the seat location. Repositioning the grab bar or seat outside of the compliant zones render the unit no longer compliant. Consult code regulations. Warning: Due to possible water spillage between the lip of the shower and the curtain, Longevity Acrylics recommends the installation of a floor drain outside the unit, in rooms where the units will be installed.



Compliance Certifications meet or exceed the following specifications:

- CAN/CSA B651-04 2006 Barrier Free
- CAN/ULC - S102.2 - M88 Flame Spread FRP laminate rating
- B45.5-11/IAPMO Z124-2011

SC2366

66" one piece acrylic shower

Model	Description
SC2366 LS/RS/NS	<ul style="list-style-type: none">- Description: 66" acrylic shower- Standard Colour: white- Features: stainless steel curtain rod, 3 stainless steel grab bars (knurled)- Threshold Height: 1-3/4"- Assembly: 1 pc. construction- Drain Location: centre drain- Moulded Seat: no seat, left seat or right seat- Not suitable for door application

OPTIONS

Option	Description
COLOURS	
Standard	Bone - Biscuit
Premium	Ice Grey - Black - Sandbar
LIGHTS	
DL-4LED	4" LED Round Dome light factory installed
CURTAIN RODS	
SCR	Stainless steel shower curtain rod
SEATS	
62-PA1452401	24" x 14-1/2" Adult Fold Down Seat RECTANGLE (White Padded)
62-PH1452401	24" x 14-1/2" Adult Fold Down Seat RECTANGLE (White Phenolic)
62-PH1452415	24" x 14-1/2" Adult Fold Down Seat RECTANGLE (Woodgrain Phenolic)
CW-HEAT-SHOWER SEAT	Comfortwarm Heating Pad™/Chrome Keypad/Control with Transflo/ 10" x 12" 20 watt pad for moulded shower seats
GRAB BARS	
DB-18-SK	Dependa-Bar™ 18"/46cm, Knurled factory installed
SHOWER DRAINS	
	Round Serenity Brass Shower Drain Infinity Style
	Round Symphony Brass Shower Drain Grate Style with removal hair trap
WD RUBBER	
	Grey Water Stopper Kit complete with Large Radius End Caps