




# SEATS



## ADULT FOLDING SHOWER SEATS / 24" x 14-1/2" (16" TO WALL)

### Phenolic


Folding shower seat manufactured from 1" (25mm) diameter, 18 gauge and 1.25" x 1.25" (32mm x 32mm), 16 gauge, type 304 stainless steel tubing with #4 satin finish. Wall mount brackets shall be 12 gauge type 304 stainless steel. Solid Phenolic seat shall be 1/2" (13mm) thick and shall be fire and mildew resistant. Shower Seat shall comply with all applicable federal, provincial and local building and safety codes.



Woodgrain




White

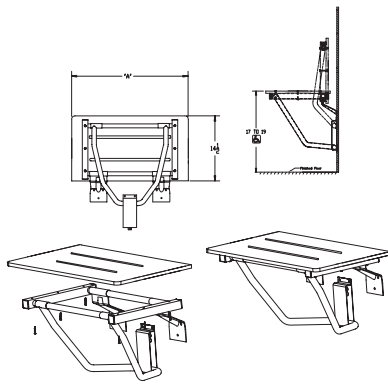

### Padded


Folding shower seat manufactured from 1" (25mm) diameter, 18 gauge and 1.25" x 1.25" (32mm x 32mm), 16 gauge, type 304 stainless steel tubing with #4 satin finish. Wall mount brackets shall be 12 gauge type 304 stainless steel. Padded vinyl cushion shall have 1.5" (38mm) high density, high resilience foam, covered with fire and mildew resistant, UV inhibited, marine grade naugahyde. Waterproof seam cushions shall have no external piping. Seat unit shall comply with all applicable federal, provincial and local building and safety codes.

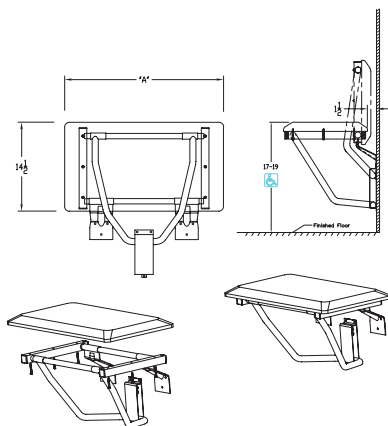

## JUNIOR FOLDING SHOWER SEATS / 18" x 14-1/2" (16" TO WALL)

### Phenolic


Folding shower seat manufactured from 1" (25mm) diameter, 18 gauge and 1.25" x 1.25" (32mm x 32mm), 16 gauge, type 304 stainless steel tubing with #4 satin finish. Wall mount brackets shall be 12 gauge type 304 stainless steel. Solid Phenolic seat shall be 1/2" (13mm) thick and shall be fire and mildew resistant. Shower Seat shall comply with all applicable federal, provincial and local building and safety codes.



Woodgrain




White

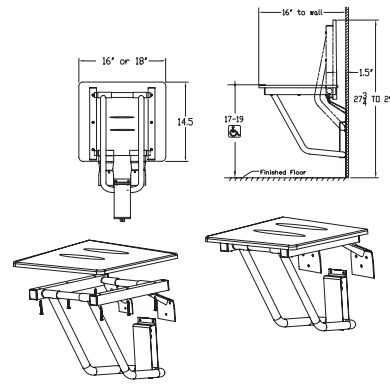

### Padded

Folding shower seat manufactured from 1" (25mm) diameter, 18 gauge and 1.25" x 1.25" (32mm x 32mm), 16 gauge, type 304 stainless steel tubing with #4 satin finish. Wall mount brackets shall be 12 gauge type 304 stainless steel. Padded vinyl cushion shall have 1.5" (38mm) high density, high resilience foam, covered with fire and mildew resistant, UV inhibited, marine grade naugahyde. Waterproof seam cushions shall have no external piping. Seat unit shall comply with all applicable federal, provincial and local building and safety codes.

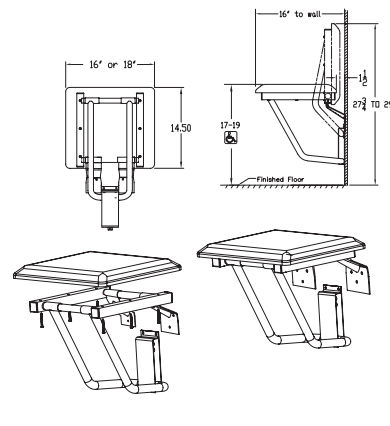



# SEATS


## FLIP-UP TUB SEATS / 32" x 14-1/5" / 28" x 14-1/5"

### Phenolic


Folding tub seat manufactured from 1" (25mm) diameter, 18 gauge, type 304 stainless steel tubing with #4 satin finish. Hinged mounting brackets shall be 12 gauge type 304 stainless steel. Hooks firmly into place when in the up position to be stored safely out of the way. Solid Phenolic seat shall be 1/2" (13mm) thick and shall be fire and mildew resistant. Shower Seat shall comply with all applicable federal, provincial and local building and safety codes.



Woodgrain



White

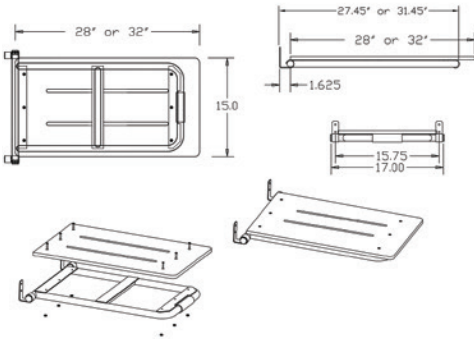

### Padded

Folding tub seat manufactured from 1 1/2" (25mm) diameter, 18 gauge, type 304 stainless steel tubing with #4 satin finish. Hinged mounting brackets shall be 12 gauge type 304 stainless steel. Hooks firmly into place when in the up position to be stored safely out of the way. Padded vinyl cushion shall have 1 1/2" (38mm) high density, high resilience foam, covered with fire and mildew resistant, UV inhibited, marine grade neoprene. Waterproof seam cushions shall have no external piping. Seat unit shall comply with all applicable federal, provincial and local building and safety codes.

