Longevity Options



SUCCESSION ACTING

4" LED Lights

Our innovative, slim design 4" LED light with switchable white provides high-quality light output and efficiency featuring a switch for easy color temperature adjustment (2700K, 3000K, 3500K, 4000K & 5000K). The LED light is wet location listed and the the LED module maintains at least 70% light output for 50,000 hours.



Construction

- Flange: metal alloy, powder coating in white.
- Lens: diffuser is used for smooth and diffused light pattern.
- Junction Box: steel with clip attached on the side of the J-box to connect with fixture or new construction plate to meet NEC (National Electric Code).
- Connector: locking power connection is used to connect J-box and fixture. Standard length of the connection is 14.96in (38cm).

OPTICS: Edge-lit LED technology uses light guided plate to distribute light. Polycarbonate lens provides even illumination throughout the space.

Electrical

Electronic power supply:

- RoHS compliant.
- Isolated driver, Grounding Class 2 Power Unit.
- Remote power supply can only accommodate one LED module and cannot be shared with other LED module.
- Fixture can be through wired.

Dimming:

- 120V versions are compatible with ELV/TRIAC (120V) dimmers.
- UNV versions are compatible with 0-10V (UNV) dimmers.

Labels

- ETL listed (UL 1598) for wet locations (covered ceiling only). IC rated for direct contact with thermal insulation.
- AirSeal for minimal air leakage.
- ENERGY STAR[®] certified.
- Title 24 compliant (JA8).

Warranty

Lifetime: Expected lifetime 50,000 hours and backed by a 5-year manufacturer's warranty







4" LED Lights








Black Trim

White Trim

Nickel Trim

Dimensions

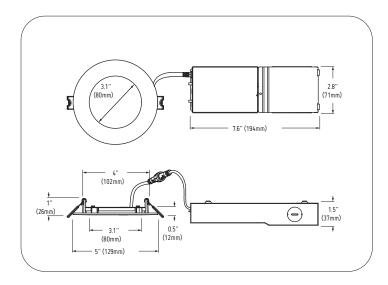






ADULT FOLDING SHOWER SEATS / 24" x 14-1/2" (16" TO WALL)


Phenolic

Folding shower seat manufactured from 1" (25mm) diameter, 18 gauge and 1.25" x 1.25" (32mm x 32mm), 16 gauge, type 304 stainless steel tubing with #4 satin finish. Wall mount brackets shall be 12 gauge type 304 stainless steel. Solid Phenolic seat shall be 1/2" (13mm) thick and shall be fire and mildew resistant. Shower Seat shall comply with all applicable federal, provincial and local building and safety codes.



Padded

Folding shower seat manufactured from 1" (25mm) diameter, 18 gauge and 1.25" x 1.25" (32mm x 32mm), 16 gauge, type 304 stainless steel tubing with #4 satin finish. Wall mount brackets shall be 12 gauge type 304 stainless steel. Padded vinyl cushion shall have 1.5" (38mm) high density, high resilience foam, covered with fire and mildew resistant, UV inhibited, marine grade naugahyde. Waterproof seam cushions shall have no external piping. Seat unit shall comply with all applicable federal, provincial and local building and safety codes.




JUNIOR FOLDING SHOWER SEATS / 18" x 14-1/2" (16" TO WALL)

Phenolic

Folding shower seat manufactured from 1" (25mm) diameter, 18 gauge and 1.25" x 1.25" (32mm x 32mm), 16 gauge, type 304 stainless steel tubing with #4 satin finish. Wall mount brackets shall be 12 gauge type 304 stainless steel. Solid Phenolic seat shall be 1/2" (13mm) thick and shall be fire and mildew resistant. Shower Seat shall comply with all applicable federal, provincial and local building and safety codes.






Padded

Folding shower seat manufactured from 1" (25mm) diameter, 18 gauge and 1.25" x 1.25" (32mm x 32mm), 16 gauge, type 304 stainless steel tubing with #4 satin finish. Wall mount brackets shall be 12 gauge type 304 stainless steel. Padded vinyl cushion shall have 1.5" (38mm) high density, high resilience foam, covered with fire and mildew resistant, UV inhibited, marine grade naugahyde. Waterproof seam cushions shall have no external piping. Seat unit shall comply with all applicable federal, provincial and local building and safety codes.

293






FLIP-UP TUB SEATS / 32" x 14-1/5" / 28" x 14-1/5"

Phenolic

Folding tub seat manufactured from 1" (25mm) diameter, 18 gauge, type 304 stainless steel tubing with #4 satin finish. Hinged mounting brackets shall be 12 gauge type 304 stainless steel. Hooks firmly into place when in the up position to be stored safety out of the way. Solid Phenolic seat shall be 1/2" (13mm) thick and shall be fire and mildew resistant. Shower Seat shall comply with all applicable federal, provincial and local building and safety codes.






Padded

Folding tub seat manufactured from 111 (25mm) diameter, 18 gauge, type 304 stainless steel tubing with #4 satin finish. Hinged mounting brackets shall be 12 gauge type 304 stainless steel. Hooks firmly into place when in the up position to be stored safety out of the way. Padded vinyl cushion shall have 11/2" (38mm) high density, high resilience foam, covered with fire and mildew resistant, UV inhibited, marine grade naugahyde. Waterproof seam cushions shall have no external piping. Seat unit shall comply with all applicable federal, provincial and local building and safety codes.















INVISIA SERENA SEAT, 18" (Available on certain 1 pc. acrylic showers)

|NV|S|A

At the intersection of luxury, comfort, beauty, and safety, the Serena seat is the centerpiece of your bathroom sanctuary upgrade.

Serena seat gives you luxurious comfort when you need it, and conveniently folds against the wall when you don't.

Made with premium commercial grade materials, your Serena seat will give you years of comfort with easy cleaning and maintenance.

Bamboo has an incredibly sustainable growing cycle, and the engineered panels are resistant to moisture, temperature, and bacteria.




Black with walnut stain



Polished chrome with ash stain



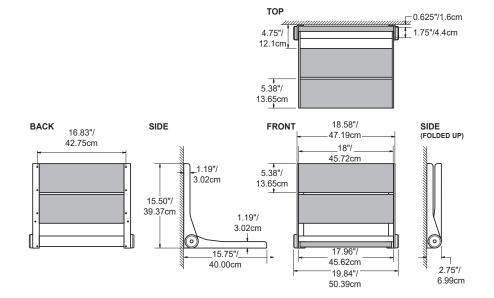

Shower Curtain Rods




Curved shower curtain rod

Product Materials

Swivel Brackets: chrome-plated zinc die cast construction with exposed surfaces in architectural satin finish. Maximum 55 degree swivel rotation.

Tubing

1" 20 gauge diameter stainless steel, seamless construction with exposed surfaces in architectural satin finish. Swivel brackets exposed surfaces are in satin finish. The shower rod will withstand a maximum load of 50 lbs.



*Rod size dependent on tubshower opening.



Straight shower curtain rod

Our shower curtain rod is made for 304 stainless steel 16 gauge (.0625 inches) brushed finish. Our acrylic is drilled to fit the curtain rod which goes through the acrylic on either end; it is then crimped and silicone. There are no exposed screws or mounting plates leaving the shower with a clean minimalist look.













Ensuring dry floors and safety for bathers, maintaining water within a barrier-free shower is crucial. With our water dam, individuals using wheelchairs, walkers, or needing low-clearance steps can enjoy maximum mobility. The collapsible rubber water dam adjusts when stepped on or rolled over, returning to its upright position to contain water effectively.

Material

T-shaped Strip: Grey EPDM Rubber, 50 Durometer


Endcaps Injection molded Vyram rubber, matching color


Dimensions


Will fit on any Barrier Free model offered

Installation

Self-Adhesive















ABS SHOWER DRAIN



Longevity's ABS shower drains with receptor base are designed for use with preformed shower stall bases. The drain receptor base integrates the body locknut allowing easier installation of the drain body to the shower base. 2" Schedule 40 DWV pipe solvent welds to the receptor base. Drain top accommodates 4-1/4" universal Snap-Tite strainers available in a variety of designer finishes.

- Made of ABS
- Easy to Install
- Fiber and rubber gasket provides a tight seal to shower drain base
- Cast brass finish available



Decorative shower drain cover to fit standard 2" ABS shower drain - Black or White

SERENITY DRAIN / CHROME OR BLACK





Featuring solid Brass construction and designed to fit most popular molded preformed Shower Bases.

- Flat round trim
- 4" Round Top featuring a 3" Drain Outlet
- Slotted or Flat grate designs Removable for easy cleaning
- Integral/Removable Stainless Steel Hair Catcher
- ABS underbody

SYMPHONY DRAIN / CHROME OR BLACK





Featuring solid Brass construction and designed to fit most popular molded preformed Shower Bases.

- Slotted round trim
- 4" Round Top featuring a 3" Drain Outlet
- Slotted or Flat grate designs Removable for easy cleaning
- Integral/Removable Stainless Steel Hair Catcher
- ABS underbody



CANPLAS PVC-FR DRAIN




Installed on 2" PVC Gray FR-Pro DWV pipe to provide shower drainage. Comes with a circular stainless steel strainer grate . Strainer basket threaded into the threaded hub of the drain body.

- Injection molded in non-toxic durable low flame and smoke rated Gray polyvinyl chloride (PVC)
- Normally used in the drainage portion of the DWV system only
- Meets flame and smoke requirements of CAN/ULC 102.2, 25150 for non combustable buildings
- Maximum service temperature rated at (140F) +60C
- High chemical resistance to nearly all acids, alkalis, alcohols, halogens, and other corrosive media
- Use approved PVC primer and solvent cement to make PVC Joints
- Corrosion resistant stainless steel strainer grate
- Flame Retardant, will not support combustion in the presence of an ignition source





WASTE & OVERFLOW



Key Features & Benefits

- True Blue® FLEX PVC bath waste full kit with touch toe stopper
- Faceplate and brass drain spud in brushed nickel finish
- Press-in trim veneer installs simply with overflow test plug and eliminates the need for additional tools or sealants
 Test plugs install with a quarter-turn and are approved for testing up to 40 ft. of head, making testing fast and
- reliable
- Foamed rubber overflow gasket provides better compression and memory, creating a better and more reliable seal to prevent leaks
- Locking drain gasket is designed with a softer durometer and will not fall off at tricky angles
- Preassembled components make installation faster
- Made of easily adjustable, flexible PVC
- Adjustable tubing can be cut to length and snaked, simplifying the installation process and making it easy to
 overcome jobsite obstructions such as floor joists and misaligned drains
- Solvent weld connection with regular PVC cement and primer





Longevity has patented magnetic pillows that position themselves and stay in the right place year after year. This pillow is moulded in soft and tear resistant material and resists chemicals and UV rays.

MG-PRIA-T04-N



MG-PR2A-T01-N



PILLOW-SCG01-KIT-** Cusioned bath pillow with slip resistant suction cups











Our range of bathroom accessories blends safety seamlessly with design, enhancing your bathroom into a serene and stylish retreat. Our Longevity products offer premium support accessories that are both reliable and visually appealing.

We aim to promote safety as a standard, particularly for individuals choosing to age in place. Our inspiration stems from the potential, both ours and that of our customers.

Included in our collection are bathroom towel bars, decorative grab bars, and shelving units, ensuring uncompromised support without sacrificing aesthetics.



INV-ACR-CP/INV-ACR-BK



INV-ACB-CP / INV-ACB-BK



INV-LB24-CP / INV-LB24-BK

DB-18-PCW / DB-18-SK

The Accent Ring is a decorative grab bar that elegantly frames your shower valve while also providing unparalleled support. Designed to support a user weight capacity of up to 500lbs / 227kgs, the Accent Ring combines elegance with safety so you can experience peace of mind when you shower. One of our top-selling luxury bathroom accessories, the Accent Ring is perfect to hold onto when adjusting your water controls and simultaneously protects your fixture investments.

Accent & Linear Bars are a bold and stylish way to add new life to the safety features of any bathroom. With a user-weight capacity that can support up to 500lbs / 227kgs, the decorative bars grant users peace of mind without compromising the beauty of the space. Featuring chrome or black colour options to complement décor, the luxurious bars can be installed anywhere—and at any angle—that support is needed.

Healthcraft Dependa-BarTM. Provides assistance exactly where it's needed most – no reaching, leaning or twisting required. With 5 different locking positions, safety is close at hand. Simply move out of the way when you don't need it. Made of #304 stainless steel for quality and strength. Rail Diameter 1.50" / 38mm Pivot Rail Length 18" / 457mm Pivot Rail Height 32.5" / 826mm Fixed Rail Length 18" / 457mm Supports up to 325 lbs



24" or 30" 1-1/4" diameter 18 gauge,

type 304 stainless steel grab bar, c/w

white finish. 14 gauge stainless steel mounting flanges, heliarc welded to the

tube to form a single structural unit /

Designed, built & tested to withstand

installed. This exceeds HUD, FHA, VA,

and local codes. Other sizes are

Store shampoo bottles and other

for peace of mind in any shower

space. The modern design cleverly disguises the support bar-rated up to 500 pounds-as an eye-catching decorative feature. The shelf tray is removable for easy cleaning, and is

made from a non-porous material for

We offer many different types of arab bars constructed from several

materials: acrylic, ABS as well as

a variety of profiled designs and

polyurethane covered metal. With

impeccable finish, they harmonize

easily to the curves of your bathtub.

added convenience.

shower products on a sophisticated

shelf that incorporates reliable support

bolt through design. 1.5" wall clearance

900lbs. (408kgs) of load when properly

ADA, ANSI and other federal, provincial,

available upon request and availability.

knurled finish tubing or powder coated

24SSGB / 30SSGB 24SWGB / 30SWGB

INV-SHS-CP / INV-SHS-BK



GB6-C/C



GBA6-WH/BN / GBA6-CL/C



GBA11-WH/BN / GBA11-CL/CP

